

impressive design and elegant details that make



Curved Edges



COP Size: 1000 mm X 170 mm

SS + Acrylic

Original Design



Imported Buttons



Curved Frame



Diecasted



Boxed Assembly






Stainless Steel **STELLAR** Performance



FRAME OPTIONS

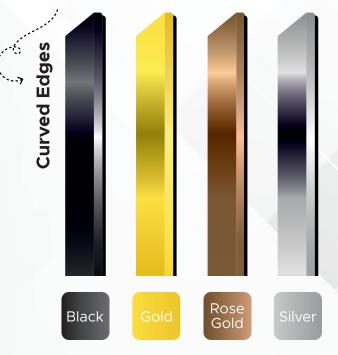

Curved Edges

Available frame colors for utmost luxury.

Aluminium diecasted curved frame with longetivity and rustfree operation

ACCESS CONTROL OPTIONS

Password & RFID



Password & RFID with Touch



Biometric with RFID & Password



Biometric with RFID & Password with Touch




Face with Biometric Password & RFID



Only RFID



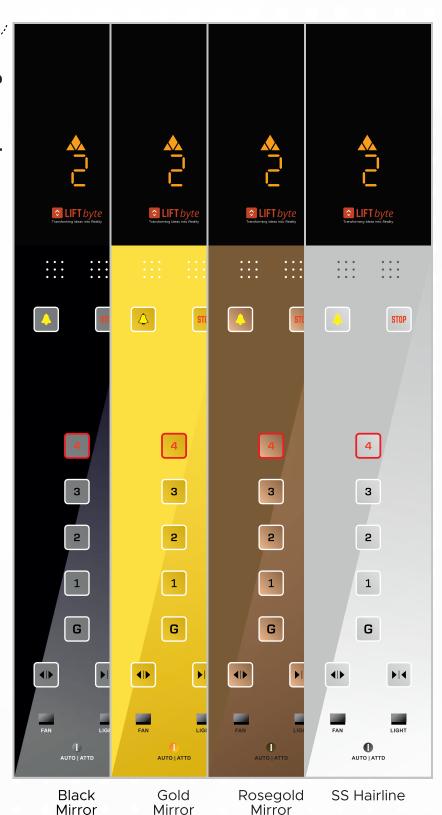

SS + Acrylic SS

Original Design



Imported Buttons



Square Frame



Diecasted



Boxed Assembly




Safety



COP Size: 1000 mm X 170 mm

FRAME OPTIONS

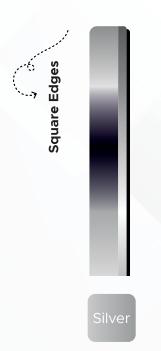

Silver square frame.




Aluminium diecasted square frame with longetivity and rustfree operation

DISPLAY OPTIONS

Standaro

7 Segment

Amber Dot

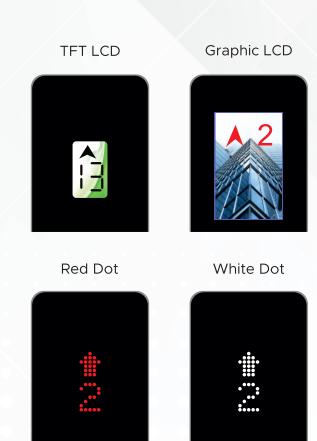

FRAME OPTIONS





FRAME COLOR OPTIONS





full acrylic



COP Size: 800 mm X 170 mm



LIFT byte
Transforming Man of musty

Imported Black Matt Finish LOP Size: 280 x 75 mm



Imported Black Matt Finish
COP Size: 1000 mm X 170 mm



10.1 inch

Surved Edges








Black Acrylic



SS Rosegold Mirror

COP Size: 500 mm X 200 mm

Compatible with all panels with parallel input and output





~ 6 Lac Pixels

10.1 Inch HD Display

Full Customisable

Custom Images

Upto 99 Floors

Next Gen AI Elevator COP LOP **Modern Touch Interface**

Touch - Toughened Glass

Touch - Acrylic Curve

Touch - Acrylic Standard

Microcontroller based Touch. Recalibrates Itself Overtime.

We Call it Al Touch!

Our touch buttons calibrate itself over period, it sets itself according to the material property due to which the performance over glass and acrylic is same. It works like magic.

TOUCH LOP & COP

toughened glass



1000 mm X 200 mm Black Glass COP Glass Thickness: 5mm



1000 mm X 200 mm White Glass COP Glass Thickness: 5mm



330 x 100 mm White Glass Jumbo LOP Glass Thickness: 2mm

acrylic

Square Edges



1000 mm X 200 mm Black Glass COP Glass Thickness: 5mm **Curved Edges**



1000 mm X 200 mm White Glass COP Glass Thickness: 5mm

Compatible with all panels with parallel and serial input and output

acrylic

FRAME OPTIONS





FRAME COLOR OPTIONS





acrylic


COLOR OPTIONS



Black



White



Glass White



Red + White



Any custom Color



Red Blue Gradient



Black Blue Gradient



White Marbel Texture Finish



Blue Marbel Texture Finish



Any Custom Image

CUSTOMISATION AS PER NEED

Elevate Your Experience With Customized Precision.

Customised Logo

Custom Colors

Crafting Uniqueness

Customised Layout



13

Feel like touch - Touchfeel **Semi-Touch Sensation**

Touchfeel - Acrylic





button COP with the feel of TOUCH

TOUCHFEEL LOP & COP ----



280 x 75 mm

Touchfeel LOP









800 x 170 mm Black Touchfeel COP

800 x 170 mm WG Touchfeel COP

800 x 170 mm BWR Touchfeel COP



Original Design



O Superior Buttons





High-end Performance



RFID Card Reader



Reliability and Service



Boxed Assembly




Available from 5HP to 50HP

- Compact size with inbuilt battery wallmounted cabinet.
- Pan India installation support by our experts
- Improved charger for Low AH batteries.
- Pure sinwave output with auto shutdown timer
- Single card solution, easier to service.
- Multiple rescues on a single charge.

Specifications	LIFT UPS / ARD - Automatic Rescue Device				
Parameters	Units	Rating			
Model	iLIFT	5 HP	7.5 HP	10 HP	15 Ah
Operating DC Voltage	Volts	48 V	48 V	72 V	72 V
No of Batteries	Nos	4	4	6	6
Battery Capacity	Ah	7 AH		7 AH	







PURE SINE WAVE



RUGGED RELIABLE



INBUILT BATTERY SUPPORTED



7 STAGE CHARGING FOR BATTERY HEALTH

ACCESS CONTROL

elevator security



Model: LB-120-B



Push Keypad



Support RFID Card (125KHz) User Capacity: 2000



Password Enabled Backup Enabled



Model: LB-120-T



Capacitive Touch



Support RFID Card (125KHz) User Capacity: 2000



Password Enabled Backup Enabled



Model: LB-103



Fingerprint Biometric



Support RFID Card (125KHz) User Capacity: 500



Password Enabled Backup Enabled



Model: LB-103-T



Optical Fingerprint Sensor | Biometric



Support RFID Card (125KHz) User Capacity: 2000



Password Enabled Backup Enabled







Model: LB-104



Face ID 300 Faces Storage



Ethernet TCP/IP Support



Password Enabled Backup Enabled



Support RFID Card (125KHz) User Capacity: 1000 Logs: 1,00,000

ACCESSORIES


INSTRUCTION PLATE



210 x 300 mm SS Hairline Instruction Plate



210 x 300 mm White Instruction Plate



210 x 300 mm Golden Instruction Plate

LIFT HANDOVER KEY

INTERCOM

















LIFTBYTE AUTOMATION PRIVATE LIMITED

AN ISO 9001:2015 CERTIFIED COMPANY

EMAIL

sales@liftbyte.com www.liftbyte.com



ADDRESS

C-231, Vill Peeragarhi, Near Sidh Baba Mandir, New Delhi - 110087



CONTACT US

931-012-5097 844-700-9001 844-700-9002



WhatsApp

EXPERIENCE US

Scan to Download LIFTbyte Brochure

